

BRUSH ROVER



BRUSH ROVER

MODEL: RM98

Make Brush Cutting FUN!


The Brush Rover is a brush-tackling beast that is fast, easy and a blast to use. Lawn tractors get bogged down by thick brush and weeds—not the Brush Rover! The low center of gravity and locking differential provide powerful traction on slopes. The hydrostatic drive gives you variable speed control with one lever. With the ROPS and seat belt that come standard, you'll be safe too.

(Battery NOT INCLUDED)



Scan to watch the Rover in action!

BRUSH ROVER	
Model	RM98
Engine	Vanguard V-twin
Net Power	21.0 HP
Cutting Width	38.4 in (975mm)
Cutting Height	2.0 - 4.7 in (50 - 120 mm)
Number of Blades	2
Deck Material	13 GA High Tensile Strength Steel
Dimensions	79"L x 42"W x 36"H(w/o ROPS)
Transmission	OREC Heavy duty HST differential lock/unlock
Wheel size	Front: 16" x 4" Lugged Rear: 17" x 8", Lugged
Ground Speeds	Forward: 0 - 7.5 (mph) Reverse: 0 - 3.4 (mph)
Weight	690 lbs.

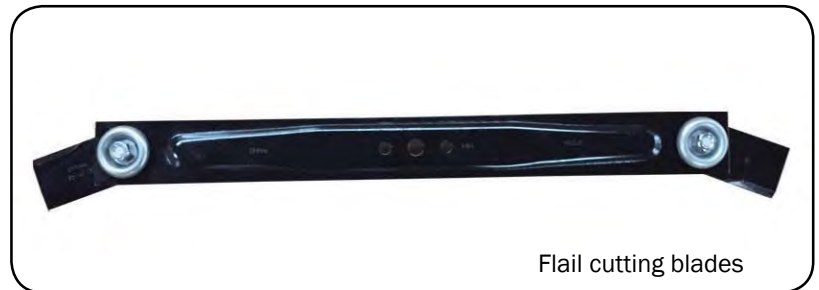

Flail cutting blades



Stamped COL-TEN® Deck

Our cutting deck is made of COL-TEN weathered steel. This is a lightweight but tough steel that is corrosion-resistant and stronger than normal steel of the same thickness.



ON/OFF Differential Lock

Just by switching the differential lock lever, you can lock the differential gear inside the transmission, giving your Rover added traction.



Variable Blade Height

You can change the blade height to suit your conditions and brush clearing needs with the blade height adjustment lever.



EZ STEERING WHEEL

21HP COMMERCIAL GRADE ENGINE

KNOCK DOWN BUMPER



Hydrostatic Drive (HST)

Tilt forward to go forward, tilt back if you want to back up.



Headlights

Dual front headlights give you better visibility in the early morning.



ROPS and Seatbelt

For your safety, always operate while wearing a seatbelt and with the ROPS in the upright position, except when working under trees or on flat ground.