

EVENT PRODUCTION EQUIPMENT RENTALS


MATRAX

Matrax is a lightweight plastic ground protection system. This system can support loads of heavy equipment and large crowds. The panels interlock, forming a stable base for large stages and grandstands or safe access for forklifts, site traffic, and heavy equipment. The ground protection system provides optimized load distribution and creates a safe even surface.


- Superior Strength
- Protects People and Property
- Lightweight and easy to install
- ✓ ADA Compliant

MATRAX FLOORING APPLICATIONS

- Aircraft Hangars
- Arena Flooring
- Event Flooring
- Grass and Turf Protection
- Temporary
 - Work Platforms
 - Pedestrian Walkways
 - Parking Lots
 - Roadways
- Tent and Outdoor Flooring
- Trade Shows
- Staging Areas
- Stadium Turf Protection
- Warehouse Flooring

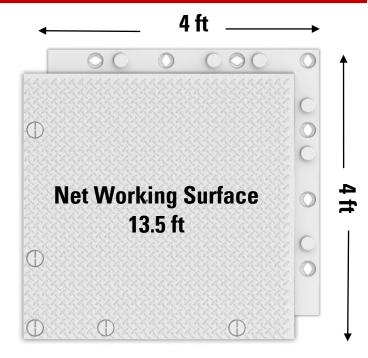

Weight 50 Lbs.







REQUEST A MATRAX RENTAL QUOTE (510) 233-5677

MATRAX HD

PRODUCT SPECIFICATIONS



RAMP SPECIFICATIONS

4 ft 43.7 in 18 in 3 wide 4 ft MALE BOTTOM FEMALE MODULE SIZE ACTUAL 43.75" x 18" x 1.5" 4' x 4' x 1.5" NET WORKING SURFACE: 13.5 ft2 (1.25 m2) WEIGHT 50 lbs (22.68 kg) 13.5 lbs COMPRESSION STRENGTH 450 psi (3,100 kps) MAX WHEEL LOAD 300 psi (2,068 kps) MAX ALLOWABLE DEFLECTION 3 in (7.62 cm) COLOR Translucent white or grey MATERIAL Virgin HDPE Plastic Virgin HDPE Plastic TEMPERATURE RANGE -4° F - 113° F (- 20° C - 45° C) BURN RATING UL 94-HB DESIGN FEATURES Diamond surface texture, closed-back Female and male configuration adjoin design, overlapping/underlapping with appropriate edge of the panels. flanges enhance load spread and create Pairs of panels are used to create a smooth surface build joints. Meets ADA compliance requirements (US). CONNECTION SYSTEM Preinstalled nylon cam locks; vertical locking system - no loose parts T-bar locking tool SHIPPING CAPACITY US Standard 48 ft flatbed truck: 840 panels/11,340 ft2 (1053.52 m2)



REQUEST A MATRAX RENTAL QUOTE (510) 233-5677